




Customizable Cold Room Compressor with 50/60Hz Frequency and 220 380 Voltage Options

Our Product Introduction

for more products please visit us on coldroomunit.com

Basic Information

- Place of Origin: China
- Brand Name: DM
- Certification: CE
- Model Number: DM-YSJ-S
- Minimum Order Quantity: 1
- Delivery Time: 30 work day
- Payment Terms: L/C, T/T, D/P, D/A

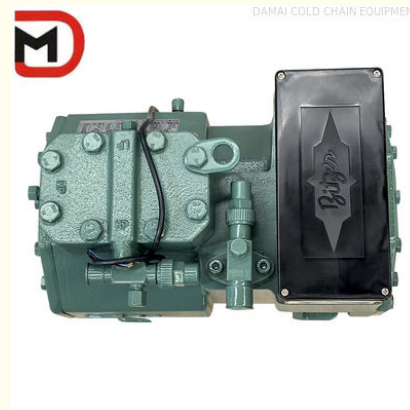

Product Specification


- Cooling Method: Air-cooled
- Oil Type: Mineral Oil, Synthetic Oil
- Frequency: 50/60Hz
- Noise Level: Low
- Capacity: 2-50m³/h
- Maximum Pressure: 25 Bar
- Voltage: 220 380
- Certifications: CE
- Highlight: Customizable Cold Room Compressor,
50/60Hz Cold Room Compressor,
220 380 Cold Room Compressor

Product Description

Product Description:

With its low noise level, this compressor is perfect for environments where noise levels need to be kept to a minimum. This makes it ideal for use in residential areas, hospitals, and other noise-sensitive locations.

But don't let the low noise level fool you – this compressor packs a punch when it comes to performance. With options for refrigerants such as R134a, R404A, R407C, and R507A, you can choose the refrigerant that best suits your specific needs. Whether you're working in a small-scale or large-scale operation, there's a refrigerant option for you.

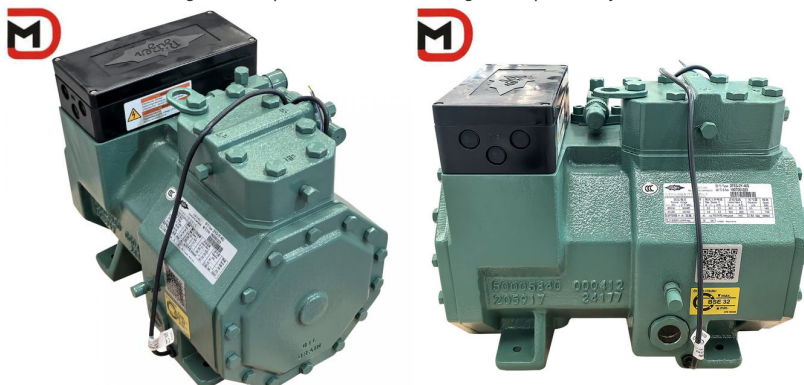

The Bitzer air compressor also offers flexibility in oil type, with options for both mineral oil and synthetic oil. This allows you to choose the oil type that best suits your needs and preferences, providing you with the peace of mind that comes with knowing you've made the right choice for your specific application.

Verdch er Typ Conpre ss0 type Compre seur type	Verfl Temp · Cond. temp. Temp · de cond	Kalteleistung Cooling capacity Puissance frigorifique	Qo	[Watt]	Lelstungs autnahme Power consumpt ion Puissanc e absorbee	Pe [KW]
		Verdampfungstemperatur" Evaporating temp 15 10 5 0			erature Température d'évaporation "	
					1 0 9 0 0 , 5 0 9 3 0 0 , 5 5	580 039 470 0,41
2KES- 05Y	40 50 60	2770 0,68 2420 0,78 2090 087	2250 0,64 1960 0,72 1690 081	1810 0,59 1570 0,67 1350 0,74	1420 0,55 1220 0,61	815 0,45 685 0,49
					7 9 0 0 · 6 0	385 042

2JES-07Y	40			3540086	2880082	23100,77	18200,72	14000,66	10400,59	740051
	50			3100098	2510093	2000087	1570080	11900,72	8750,64	6050,53
	60			26901,10	21701.04	17300.96				
2HES-1Y	40			46501,02	38200,99	31000,94	2490089	19600,83	15200,76	1140068
	50			40801,18	33301,13	26901,07	2150099	16900,91	12800,81	9400,70
	60			3510135	2850127	22901,18	1810108	1390,7	10400,84	740071

2FES- 2Y	40 50 60			6850 1,43 5880 1,69 4960 190	5640 1.38 4820 1,60 4060 1,78	4590 1,32 3910 1,49 3270 1,64	3690 124 3130 1,38	2	2270 1,04 1880 1.11	1720 092 1400 096	
								9			
								2			
								0			
								1			
								,			
							2600 149	1	1530 1,15	1110 097	
								5			
								2			
								0			
								1			
								,			
2FES- 3Y	60 70 80			6000 2,12 4970 2,35 3960 258	4960 199 4110 220 3270 239	4060 1.86 3350 2.03 2660 2.18	3280 1,72 2690 1,85 2130 196	2610 157 2130 1,66 1670 1,74	2	1540 1,24 1230 1.27 940 1,27	1120 106 875 106
									0		
									3		
									0		
									1		
									,		
									4		
									1		
									1		
									6		
									4		
									0		
1											
,											
4											
7											
1											
2											
8											
0											
1											
.											
5											
1											

2EES-2Y	40 50 60			8600 1,78 7440 209 6290 234	7040 1,70 6070 1.95 5110 2,14	5700 1,60 4900 1,79 4100 1,93	4560 1,48 3890 1,62	3 5 8 0 1 , 3 4 3 0 1 , 4 4	2760 1,20 2320 1,25	2070 104 1710 107								
	60 70 80			7650 251 6260 2,74 4840 289	6290 2,33 5120 2,50 3940 260	5110 2,14 4140 2,26 3150 231	4100 1,94 3290 2,01 2470 2.02	3230 1,73 2560 1,76 1890 173	2 5 0 0 1 . 5 1 9 5 0 1 1 3 9 0 1 . 4 5	1880 1,30 1420 1,27 975 1.19	1350 1,10 990 104							

2DES- 2Y	40		10240	8390	6800	5450	430001,6236	3320	2510
	50		2,158870	2.067260	1,935870	1,794680	701	1,452810	1272090
	60		2,547530	2.376130	2,174940	1,973910	1,2300	1,53131	1680
			286	2.61	235	209	75304001,82	1,56132	
2DES- 3Y	60	9140	7530	6130	4940	3910	304001,823	2300	
	70	301	280	2,57	232	207	90	1,571680	
		7510	6160	4990	3990	3130	01	1770133	
	80	331	3,02	2,73	2,43	2,13	1,1230	1,551250	
		5830	4760	3820	3020	2320	,8417	1,29	
		352	3,17	282	2.46	212	90179		

2CES-3Y	40		12530 2,60 10900 308 9290 349	10290 2,50 8940 288 7600 320	8370 2,36 7250 2,66 6150 2,90	6720 2,19 5810 242	5 3 2 0 1 , 9 9 4 5 8 0 2 , 1 7	4140 1,79 3540 1,91	3150 1,58 2670 1,66
							3 8 4 0 2 , 2 8 3		
							4900 259 , 2 8		
							3 8 4 0 2 , 2 8 3		
							0 2940 8 1,99		
							0 2310 2 2,00		
							. 1650 3 1,96		
							4 2 2 6 0 2 .3 3		
2CES-4Y	60		11250 3,69 9290 4,08 7250 4.37	9290 3,44 7650 3,74 5950 396	7600 3,17 6240 340 4820 354	6150 2,88 5010 3,04 3830 3.12	4900 2,58 3960 2,69 2980 2.72	0 2940 8 1,99 0 2310 2 2,00 .1650 3 1,96	2180 1,70 1670 169

Applications:

DM-YSJ-S Air Compressor has a capacity of 2-50m³/h and is designed to work with maximum pressure of 25 Bar. It is a reliable and efficient option for refrigeration systems. The compressor is designed with advanced technology, which ensures high performance, low noise and long service life.



The DM-YSJ-S Air Compressor is perfect for commercial refrigeration applications. It can be used in walk-in freezer compressors, commercial refrigeration systems, and other large and industrial refrigeration equipment. The compressor also provides significant energy savings and environmental benefits, making it an ideal choice for any facility.

In addition to its high performance and reliability, the DM-YSJ-S Air Compressor is also easy to install and maintain. The compressor is equipped with a scroll compressor, which makes it easy to maintain and repair. This ensures that the compressor continues to perform optimally throughout its service life.

Support and Services:

As a leading manufacturer of air compressors, Bitzer offers a range of technical support and services to ensure optimal performance and efficiency of its products. These include:

Installation and commissioning support

Maintenance and repair services

Remote monitoring and diagnostics

Training and education programs

Spare parts and accessories

Energy audits and optimization services

Our team of experienced engineers and technicians are available to provide expert advice and assistance to help you get the most out of your Bitzer air compressor. Contact us to learn more about our technical support and services.



Packing and Shipping:

Product Packaging:

The Bitzer Air Compressor will be packaged in a wooden box to ensure safe transportation.

The compressor will be securely fastened inside the box with foam inserts to prevent any damage during shipping.

The packaging will include all necessary manuals and documentation for proper installation and use of the compressor.

Shipping:

The Bitzer Air Compressor will be shipped via a reliable courier service to ensure timely delivery.

The shipping cost will be calculated based on the destination and weight of the package.

The customer will receive a tracking number once the product has been shipped to track the status of the delivery.

Delivery times may vary depending on the destination, but we strive to deliver the product as soon as possible.



Zhejiang Damai Cold Chain Equipment Co., Ltd.



86-13246760185



sales3@dmllcn.com



coldroomunit.com

Factory No. 1, Wanfeng Aviation Town, Wozhou Town, Xinchang County, Zhejiang Province